




ENSIO Floodlight (Integrated) - IP66

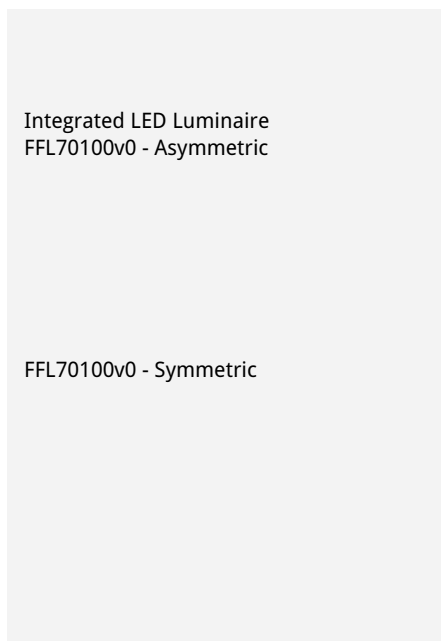

Product Code:

FFL70100v0



Electrical Data	
Voltage (V)	220-240V
Power Factor (λ)	>0.9
Product Data	
Product Wattage (W)	180
Beam Angle (°)	70, 110
Tilting Angle (°)	90
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6500K)
Colour Render Index (Ra)	Ra80
Colour	Black (BK24)
Materials	Aluminum housing with anodizing aluminum louvre and PC cover
Protection Class	Class I
Dimmable	No
Operating Temperature	-30°C to +50°C
Weight (g)	6584
Application	Billboards, Gate areas, Pillar Facades, Signages
Performance Data	
Max. Luminous Intensity (cd)	12500 [70°], 11000 [110°]
Luminous Flux (lm)	21000 [3000K], 22000 [4000K], 22000 [6500K]
Luminous Efficacy (lm/W)	117 [3000K], 122 [4000K], 122 [6500K]
Rated Life (hrs)	50000
IP Rating	IP66
Product Dimensions	
Length (mm)	335
Width (mm)	467
Height (mm)	72


Product Code: FFL70100v0

MEGAMAN® 2005-2020. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.cn.megaman.cc



Product Code: FFL70100v0

MEGAMAN® 2005-2020. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.cn.megaman.cc